


# Monorail Tracks

## CG30

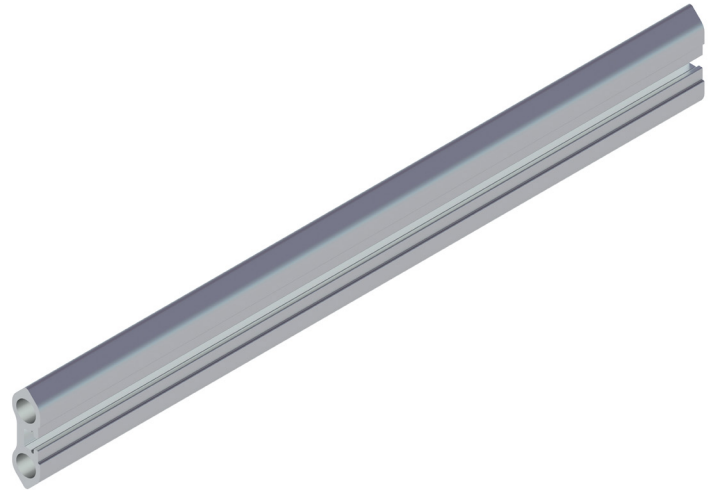

<b>Design Standard</b>	EN 1808
<b>Track Type</b>	CG30
<b>Dimensions</b>	139 mm x 46 mm
<b>Weight</b>	7.28 kg/m
<b>Yield Limit</b>	160 N/mm <sup>2</sup> 240 N/mm <sup>2</sup>
<b>Minimum Horizontal Bend Radius</b>	600 mm
<b>Minimum Vertical Bend Radius</b>	600 mm
<b>Typical Bracket Span</b>	2.5 m - 3.2 m
<b>Bracket Fastening</b>	Side
<b>Fastening Method</b>	2 x M16 bolts for each bracket
<b>Material</b>	Aluminium alloy 6063-T6 Aluminium alloy 6061-T6
<b>Finish</b>	Mill finish
<b>Optional Surface Treatment</b>	Anodized
<b>Optional Colors</b>	RAL 7004 RAL 9001

The CoxGomyl™ monorail is the ideal facade maintenance system for buildings with limited roof space. It can be installed with minimal visual impact respecting the architectural aesthetic. It consists of aluminium tracks in combination with the CoxGomyl trolley range and suspended platforms or as an abseil solution.

CoxGomyl CG30 monorail tracks is side mounted and ideal for climbing applications from 15 to 90 degrees. It can be used also in gantries. Suitable for indoor and outdoor installations.

*CoxGomyl trolleys must be used with the CG30 track.*